

09/03/98  
JC515 U.S. PTO

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:  
FROMMER LAWRENCE & HAUG LLP  
745 FIFTH AVENUE  
NEW YORK, NEW YORK 10151  
TEL: (212) 588-0800  
FAX: (212) 588-0500

Date: September 3, 1998  
Attorney Docket No.: 450117-4648

A  
JC586 U.S. PTO  
09/14/98  
09/03/98

ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office  
of an application for patent in the name(s) of:

Ralf Böhnke

entitled:

TRANSMISSION SYSTEM FOR OFDM-SIGNALS WITH OPTIMIZED SYNCHRONISATION

The following are enclosed:

- ☒ Specification ( 11 pages)  
☒ 5 Sheet(s) of Drawings  
☒ 17 Claim(s) (including 5 independent claim(s))  
☐ This application contains a multiple dependent claim

- ☒ Our check for \$ 994.00, calculated on the basis of the claims as  
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$790.00 (\$395.00)	\$ 790.00
Number of Claims in excess of 20 at \$22.00 (\$11.00) each: 0	-0-
Number of Independent Claims in excess of 3 at \$82.00 (\$41.00) each: 2	164.00
Multiple Dependent Claim Fee at \$270.00 (\$135.00)	-0-
Total Filing Fee	\$ 954.00
<input checked="" type="checkbox"/> Assignment Recording Fee \$40.00	\$ 40.00

- ☒ Oath or Declaration and Power of Attorney  
☒ New ☒ signed ☐ unsigned  
☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate  
the claim(s) for priority made in the Declaration:

<u>Application No.</u>	<u>Filed</u>	<u>In</u>
97115345.7	4 September 1997	Europe

Please charge any additional fees required for the filing of this  
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicant  
WILLIAM S. FROMMER

By: William S. Frommer  
Reg. No. 25,506

"Express Mail" mailing label number EL026388239US

Date of Deposit September 3, 1998

I hereby certify that this paper or fee, and a patent application and accompanying papers, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

HOWARD CUTLER

(Typed or printed name of person mailing paper or fee)

Howard Cutler

(Signature of person mailing paper or fee)

PATENT  
450117-4648

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Ralf Böhnke  
Filed : Herewith  
For : TRANSMISSION SYSTEM FOR OFDM-SIGNALS WITH  
OPTIMIZED SYNCHRONISATION

745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL026388239US  
Date of Deposit September 3, 1998  
I hereby certify that this paper or fee is being  
deposited with the United States Postal Service  
"Express Mail Post Office to Addressee" Service  
under 37 CFR 1.10 on the date indicated above and  
is addressed to the Assistant Commissioner for  
Patents, Washington, D.C. 20231.

HOWARD CUTLER

(Typed or printed name of person  
mailing paper or fee)

Howard Cutler

(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,  
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 3, line 1, delete "or 2";

Claim 4, line 1, change "one of the claims 1 to 3" to  
--claim 1--;

Claim 7, line 1, delete "or 6";

Claim 8, line 1, change "one of the claims 5 to 7" to  
--claim 5--;

Claim 11, line 1, delete "or 10";

Claim 12, line 1, change "one of the claims 9 to 11" to  
--claim 9--;

Claim 15, line 1, delete "or 14";

Claim 16, line 1, change "one of the claims 13 to 15"  
to --claim 13--.

Cancel claim 17.

Add new claim 18 as follows:

--18. Transmission system for transmitting OFDM-signals,  
comprising:

a transmission apparatus including modulation  
means for modulating said signals onto a plurality of subcarriers  
by OFDM-modulation, transformation means for transforming said  
modulated signals into the time domain, and transmission means  
for transmitting said signals **characterized in** that in said  
modulation means every M-th subcarrier is modulated, wherein M is  
an integer greater than or equal to 2; and

a receiving apparatus for receiving said OFDM-  
signals having M identical or respectively mirrored waveforms  
within one OFDM-timeburst, including receiving means for  
receiving said OFDM-signals, correlation means for correlating  
said waveforms to obtain time synchronization, transformation  
means for transforming said signals into the frequency domain,

and demodulation means for demodulating said transformed  
signals.--


REMARKS

The claims have been amended to eliminate multiple  
dependencies. The filing fee has been calculated based upon  
these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicant

By

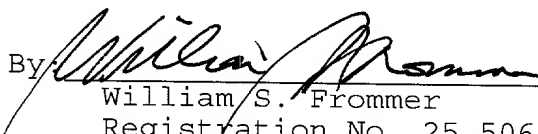  
William S. Frommer  
Registration No. 25,506  
Tel. (212) 588-0800

PATENT  
450117-4648

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: TRANSMISSION SYSTEM FOR OFDM-SIGNALS  
WITH OPTIMIZED SYNCHRONISATION

INVENTOR: Ralf Böhnke

William S. Frommer  
Registration No. 25,506  
FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

**SONY INTERNATIONAL (EUROPE) GMBH****Transmission System for OFDM-Signals with optimized Synchronisation**

5 The present invention relates to a transmission method according to the preamble of claim 1, to a transmission apparatus according to the preamble of claim 5, a receiving method according to claim 9, a receiving apparatus according to claim 13 and a transmission system according to claim 17.

10 In a conventional OFDM-system signals or information contained in signals are modulated onto subcarriers in the frequency domain. The spacing between the subcarriers is equal and the subcarriers are arranged orthogonally in the frequency domain. The respectively applied modulation scheme varies for example the magnitude and phase of the described subcarriers. A conventional transmission apparatus for transmitting OFDM-signals  
15 therefore comprises as basic elements modulation means for modulating said signal onto a plurality of subcarriers using a OFDM-modulation method, transformation means for transforming said modulated signals into the time domain, and transmission means for transmitting said signals. In a conventional OFDM-system, a transmission means for OFDM-signals extends a time domain signal after a transformation into the time domain  
20 (e. g. by an inverse discrete Fourier transformation) by some guard samples to overcome multipath effects during the transmission. Usually the extension of the time domain signal is done by a cyclic extension, wherein a part of the wave form is repeated. A corresponding OFDM-signal receiving apparatus can perform correlation utilizing the two identical wave form parts to obtain information on the timing of the OFDM-time bursts for  
25 further processing. Usually this timing information is used to optimally place the discrete Fourier transformation window in the receiving apparatus to be able to transform the modulated subcarriers into the frequency domain and to demodulate them thereafter.

To provide an efficient transmission system, the guard time or cyclic extension has to be  
30 as short as possible, namely slightly larger than the longest expected transmission path duration, which can result in poor cyclic extension based correlation properties in a receiving apparatus if the cyclic extension is very short (e. g. only a few samples). In this case, in known OFDM-systems synchronization bursts are used, which contain only synchronization information. This reduces the transmission efficiency, since a special  
35 synchronization burst designed in the time domain does not contain information (in the frequency/subcarrier domain) to be transmitted.

The object of the present invention is therefore to provide a transmission method according to the preamble of claim 1, a transmission apparatus according to the preamble of claim 5, a receiving method according to claim 9, and a receiving apparatus according to claim 13, which provide optimized correlation possibilities.

5

This object is achieved by a transmission method according to claim 1, a transmission apparatus according to claim 5, a receiving method according to claim 9, and a receiving apparatus according to claim 13. Also, this object is achieved by a transmission system according to claim 17.

10

The transmission method for transmitting OFDM-signals according to the present invention comprises the steps of modulating said signals onto a plurality of subcarriers using a OFDM-modulation method, transforming said modulated signals into the time domain, and transmitting said signals, characterized in that in said modulating step every

15

M-th subcarrier is modulated with a signal, wherein M is an integer and  $M \geq 2$ .

The transmission apparatus for transmitting OFDM-signals according to the present invention comprises modulation means for modulating said signals onto a plurality of subcarriers using a OFDM-modulation method, transformation means for transforming

20

said modulated signal into the time domain, and transmission means for transmitting said signals, characterized in that in said modulation means every M-th subcarrier is modulated, wherein M is an integer and  $M \geq 2$ .

The receiving method according to the present invention is adapted for receiving OFDM-signals comprising M identical or respectively mirrored wave forms within one OFDM-timeburst, wherein M is an integer and  $M \geq 2$ , and comprises the steps of receiving said

25

OFDM-signals, correlating said wave forms to obtain time synchronization, transforming said signals into the frequency domain, and demodulating said signals.

30

The receiving apparatus according to the present invention is adapted for receiving OFDM-signal comprising M identical or respectively mirrored wave forms within one OFDM-timeburst, wherein M is an integer and  $M \geq 2$ , and comprises receiving means for receiving said OFDM-signals, correlation means for correlating said wave forms to obtain time synchronization, transformation means for transforming said signals into the

35

frequency domain, and demodulation means for demodulating said signals.

Advantageous features of the present invention are defined in the respective subclaims.



The modulation of every M-th subcarrier according to the present invention, after the succeeding transformation of the signals into the time domain, e. g. by an inverse discrete Fourier transformation, results in a signal containing M identical or respectively mirrored wave forms, whereby the total duration of the OFDM-timeburst is still  $1/f_0$  ( $f_0$  is the subcarrier spacing). With M identical wave forms within one OFDM-timeburst, the corresponding receiving apparatus can perform an optimized correlation in the time domain, e. g. to obtain time and frequency information and synchronization, respectively. Further on, information to be transmitted can be modulated onto every M-th subcarrier and the transmission of a special time-domain synchronization time burst usually not containing useful information in the frequency-subcarrier domain is not necessary.

The present invention can be applied to every transmission system based on a multicarrier OFDM-modulation method, e. g. wireless and wired transmission systems. Possible and advantageous applications of the present invention in a wireless transmission system are for example the RACH (Random Access Channel), the BCCH (Broadcast Control Channel), and the IACH (Initial Acquisition Channel). Generally, the present invention is especially effective in scenarios where conventional algorithms to improve correlation based time synchronization, e. g. averaging over multiple time bursts is not possible. The present invention can be applied to any OFDM-system, particularly, when a robust time synchronization for further signal processing, e. g. discrete Fourier transformation, is required.

Advantageously, in said modulation means the not modulated subcarriers are set to zero. Further advantageously, only subcarriers with even indices are modulated. If only subcarriers with even indices are modulated (e. g.  $M = 2$ ), a full (complex) time domain signal consisting of two equal wave forms is obtained after the transformation into the time domain (e. g. by an inverse discrete Fourier transformation). If, on the other hand, only subcarriers with odd indices are modulated (e. g.  $M = 2$ ), a full (complex) time domain signal after the transformation into the time domain is obtained, which contains two respectively mirrored wave forms. In this case, the two wave forms are mirrored so that the correlation result is negative and an additional absolute value unit (or inverter) is necessary in the receiving apparatus to achieve a positive correlation result and a correct frequency offset.

Advantageously, said modulation means comprises means for generating integer values from 0 to L-1, wherein L is the number of available subcarriers, whereby said modulation means modulates every M-th signal onto said subcarriers on the basis of said integer values.

Advantageously, in the correlation means of the receiving apparatus according to the present invention, the identical or respectively mirrored wave forms are correlated on the basis of a delay value  $L1=S/M$  and averaged over  $L2 \leq S/M$  samples, whereby  $S$  is the total number of samples in one OFDM-timeburst.

It is further advantageous in the receiving apparatus according to the present invention to provide a peak detection means after said correlation means for providing time synchronization for the transformation of said signals into the frequency domain. It is further advantageous to provide a frequency offset detection means after said correlation means for providing frequency synchronization for the transformation of the signals into the frequency domain.

The transmission system for transmitting OFDM-signals according to the present invention comprises a transmission apparatus according to the present invention and a receiving apparatus according to the present invention. This transmission system can be based on a wireless or wired transmission of signals.

The present invention is explained in detail by means of preferred embodiments relating to the enclosed drawings, in which

fig. 1 shows an embodiment of the transmission apparatus according to the present invention,

fig. 2 shows the modulation unit of the transmission apparatus shown in fig. 1 in more detail,

fig. 3 shows an example of modulating every 4-th subcarrier with a signal in the frequency domain,

fig. 4 shows an example for a signal comprising four identical wave forms in the time domain,

fig. 5 shows an embodiment of a receiving apparatus according to the present invention,

fig. 6 shows the time/frequency synchronization means of the receiving apparatus shown in fig. 5 in more detail and in a general form,

fig. 7 shows the time/frequency synchronization means of the receiving apparatus shown in fig. 5 for a signal comprising two identical wave forms,

5 fig. 8 shows the time/frequency synchronization means of the receiving apparatus shown in fig. 5 for a signal comprising four identical wave forms,

fig. 9 shows the frequency offset detection means in more detail,

10 fig. 10 shows a frequency spectrum for a conventional correlation performed on the basis of a cyclic extension of a time burst, and

fig. 11 shows a frequency spectrum for a correlation according to the present invention for a random access channel.

15

Fig. 1 shows an embodiment of a transmission apparatus according to the present invention. In the transmission apparatus shown in fig. 1, data 1 are channel coded in a channel coding means 2 and interleaved in an interleaving means 3. In a modulation unit 4, the signals carrying the data to be transmitted are modulated with an OFDM-modulation method. An OFDM-system is a multicarrier system with a plurality of subcarriers. In the modulation unit 4, the signals carrying the information to be transmitted are modulated on every M-th subcarrier, wherein M is an integer and  $M \geq 2$ . The modulated signals, for example APM-signals, amplitude-phase-modulated signals, are transformed into the time domain in an inverse discrete Fourier transformation means 5. After the transformation into the time domain, the transformed signals are provided with a cyclic extension in a cyclic extension means 6a and then shaped in a burst shaping means 6b. In the cyclic extension means 6a, the OFDM-time bursts are provided with a guard time (= cyclic extension of the signal) to mitigate multipath effects during transmission. This cyclic extension serves also to provide correlation (to achieve time and frequency synchronisation) in a corresponding receiving apparatus. The cyclic extension consists in a part of the signal being added to the end of the signal, so that the receiving apparatus can conduct calculations on the basis of the doubled signal parts to provide correlation. The burst shaping means 6b does not have to be provided in the transmission apparatus according to the present invention, since the described correlation method (to achieve time and frequency synchronisation) is based on the cyclic extension only. The provision of the burst shaping means 6b, however, improves the transmission spectrum (reduced out of band spurious emission).

20

25

30

35

After the burst shaping means 6b, or, if the burst shaping means 6b is not provided, after the cyclic extension means 6a, the signals are digital/analog-converted in a D/A-converter 7 and then RF-upconverted in a RF-upconversion means 8 to be transmitted by an antenna 9.

In fig. 2, the modulation means 4 of the transmission apparatus shown in fig. 1 is shown in more detail. The transmission means 4 comprises a subcarrier number generator 10 for generating integer values  $0, 1 \dots L-1$  corresponding to the available subcarrier number  $L$  in one frequency slot in the OFDM-system. The integer values generated by the subcarrier number generator 10 are fed to a modulation unit 17. Also, the integer values generated by the subcarrier number generator 10 are fed to a modulo means 11, which generates series of integer values depending on the chosen modulation step of the modulation means 4. If, for example, every 4-th subcarrier is modulated with a signal, so that  $M = 4$ , the modulo means 11 outputs integer values  $0, 1, 2, 3, 0, 1, 2, 3, 0, 1, 2, 3, \dots$ .

The output of the modulo means 11 is fed to a compare means 12, which compares the integer values provided by the modulo means 11 with integer values generated by a compare value generator 13. The compare means 12 gives an "active" signal to a switch means 14, if the inputs from the modulo means 11 and the compare value generator 13 are equal. If, for example in the above example, the compare value generator 13 generates an integer value "1", the compare means 12 outputs an "active" signal every 4-th time an integer value "1" is fed from the modulo means 11 ( $M=4$ ). Otherwise, the output of the compare means 12 is a "not active" signal. If the switch means 14 obtains an "active" signal from the compare means 12, it connects a line 16 providing signals with data to be modulated with the modulation unit 17. If the switch means 14 obtains an "not active" signal from the compare means 12, it connects a zero terminal 15 with the modulation unit 17. In the above example ( $M=4$ ), the switch means 14 therefore connects the data line 16 every 4-th time an integer value is generated by the subcarrier number generator 10 with the modulation unit 17. Therefore, every 4-th subcarrier is modulated with signals carrying data in the modulation unit 17. The other subcarriers are not modulated in the modulation unit 17, since the switch means 14 selects the zero terminal 15 at the time these subcarriers are fed to the modulation unit 17. At the zero terminal 15, a "0" value is input (complex:  $0=0+j \times 0$ ) so that the other subcarriers are not modulated.

In fig. 3, a frequency domain representation for the modulation of every 4-th subcarrier is shown. The horizontal axis shows the number  $S=32$  of the inverse discrete Fourier transformation samples  $0 \dots 31$  and the vertical axis shows the magnitude of the subcarriers. Also, one frequency slot comprising  $L=24$  ( $0 \dots 23$ ) available subcarriers is shown wherein

each subcarrier is sampled in the inverse discrete Fourier transformation means 5. Each 4-th subcarrier 18 (subcarrier number 0, 4, 8, 12, 16 and 20) is modulated with a signal, wherein the spacing between adjacent subcarriers is  $f_0$ . The IDFT samples 0 ... 3 and 28 ... 31 are unmodulated guard subcarriers (to perform a power-of-2 DFT, here 32-point DFT), and the samples 4 ... 27 are the used subcarrier samples (here we assumed one frequency slot consists of 24 subcarriers)..

Fig. 4 shows the corresponding time domain wave forms for the example shown in fig.3, wherein every 4-th subcarrier is modulated. The modulation of every 4-th subcarrier leads to time domain signals containing 4 identical wave forms, since only subcarriers with even indices (compare fig. 3) have been modulated.

In fig. 4A, the IN-part (in-phase part), and in fig. 4B, the QUAD-part (quadrature part) of a wave form signal in the time domain, in which every 4-th subcarrier has been modulated in the frequency domain, is shown. Fig. 4C shows the envelope of the IN-part and the QUAD-part shown in fig. 4A and fig. 4B, respectively (envelope =  $\text{SQRT}\{\text{IN}*\text{IN}+\text{QUAD}*\text{QUAD}\}$ ). As can be seen, the wave form signals contain 4 identical wave forms, since in the frequency domain only subcarriers with even indices have been modulated. The modulation of subcarriers with only odd indices leads to wave forms which are slightly different to the wave forms shown in fig. 4. The modulation of subcarriers with only odd indices leads after the transformation in the time domain to wave form signals with respectively mirrored wave forms. In this case, every second wave form in the time domain signal is mirrored in respect to the correspondingly preceding wave form. If a sample in a first waveform is  $x_1=a+j\times b$ , the corresponding sample in the second waveform is  $x_2=(-a-j\times b)=(-1)*(a+j\times b)$ .

In fig. 5, an embodiment of a receiving apparatus according to the present invention is shown. Data transmitted, e. g. from a transmission apparatus as shown in fig. 1, are received in an antenna 19 and RF-downconverted in a RF-downconversion means 20. Then, the signals are analog to digital converted in an A/D-converter 21 and fed to a time/frequency synchronization means 22. In the time/frequency synchronization means 22, the received signals are correlated and synchronized, so that a proper transformation to the frequency domain in a succeeding discrete Fourier transformation means 23 can be executed. The transformed signals are then demodulated in a demodulation means 24. The demodulated signals are de-interleaved in de-interleaving means 25 and then channel-decoded in a channel-decoding means 26. The channel-decoding means 26 outputs data signals to be further processed.

In fig. 6, the time/frequency synchronization means 22 of the receiving apparatus shown in fig. 5 is shown having a general structure. The time-/frequency synchronization means 22 consists generally of a correlation means with one or more correlator parts 28, 29, 30, 31 and a moving average means 40. After the moving average means 40, an absolute value means 45 is provided. After the absolute value means 45, a peak detection means 46 can be provided. The output of the peak detection means 46 and the output of the moving average means 40 can be fed to an also optionally provided frequency offset detection means 47.

- 10 The time/frequency synchronization means 22 comprises (M-1) correlator parts. If, for example, every 4-th subcarrier is modulated, the time-/frequency synchronization means 22 comprises 3 correlator parts, as is shown in more detail in fig. 8.

In fig. 6, the output of the A/D-converter 21 is fed to a first correlator part 28 comprising a delay means 32 and a multiplier 35. The output of the A/D-converter is fed to the delay means 32, which delays the signal with a factor  $z^{-L1}$ . The output of the delay means and the output of the A/D-converter 21 are multiplied in the multiplier 35. The output of the delay means 32 is further fed to a delay means 33 and a multiplier 36 of a second correlator part 29. The delay means 33 delays the output of the delay means 32 with a factor  $z^{-L1}$ . The output of the delay means 33 is multiplied in the multiplier 36 with the output of the delay means 32. The outputs of the multiplier 35 and the multiplier 36 are added in an adder 38. Successive correlator parts and adders are symbolized by a block 30. The (M-1)th correlator part 31 delays the output of the delay means of the preceding correlator part in a delay means 34 by a factor  $z^{-L1}$  and multiplies the output of the delay means 34. The output of the delay means 34 is multiplied in a multiplier 37 with the output of the preceding delay means. The output of the multiplier 37 is added in an adder 39 to the output of a preceding adder.

Then, the output of the last adder 39 is fed to the moving average means 40. In the moving average means 49, the incoming signal is delayed in a delay means 41 by a factor  $z^{-L2}$ . In an adder 42, the output of the delay means 41 is subtracted from the incoming signal. The output of the adder 42 is fed to an adder 43, which is backfed with its own output delayed by factor  $z^{-1}$  in a delay means 44. The moving average means thus performs the function

$$(1-z^{-L2})/(1-z^{-1}) = \sum_{m=0}^{L2} z^{-m},$$

which means  $y(m) = x(m) + x(m-1) + \dots + x(m-L2)$  if the input signal of the MAV means 40 is defined as  $x(m)$  and its output signal is defined as  $y(m)$ .

In the example of fig. 6 and also the examples of figs. 7 and 8, the correlation delay value  $L1$  is  $L1 = S/M$ . The moving average value  $L2$  is  $L2 \leq S/M$ , so that a signal fed to the moving average means 40 is delayed over  $L2 \leq S/M$  samples. In both cases,  $S$  is the total number of samples in one OFDM-timeburst. In the example shown in fig. 3,  $S=32$  and  $M=4$ , so that  $L1=8$  and  $L2 \leq 8$ . The best performance is achieved if  $L2$  is close to  $S/M$ , in the example of fig. 3 this means  $L2$  should be close to 8 samples (e. g. 6, 7 or 8 samples).

10 In the correlation means 28, 29, 30, 31 and the moving average means 40, correlation in the time domain to obtain time synchronization information for further processing of the incoming signals is performed. The output of the moving average means 40 is then fed to an absolute value means 45. The output of the absolute value means 45 is fed to a peak detection means 46, which identifies the best correlation result for an optimum estimate of the window position of the discrete Fourier transformation in the discrete Fourier transformation means 23. In an ideal transmission case, the imaginary part of the correlated signal is zero. In the case of a frequency offset in the transmitted signal, the imaginary part of the correlated signal is not zero, so that a frequency offset detection has to be performed in a frequency offset detection means 47. Conventionally, if all subcarriers are modulated, the frequency offset detection range is limited to  $-f_0/2 \dots +f_0/2$ , whereby  $f_0$  is the subcarrier spacing. According to the present invention, the frequency offset detection range in the frequency offset detection means 47 is extended to  $M \times (-f_0/2) \dots M \times (+f_0/2)$ , wherein  $f_0$  is the subcarrier spacing. Therefore, the frequency offset detection range is advantageously extended according to the present invention. The output of the frequency offset detection means 47 and the peak detection means 46 are used for time-/frequency synchronization in the succeeding discrete Fourier transformation means 23.

30 In a case, in which only subcarriers with odd indices are modulated, an additional absolute block means (or sign inverter) can be used in the receiving apparatus to achieve a positive correlation result. This additional absolute block means can, for example, be provided between the last correlation part and the moving average means 40. In order to achieve time synchronisation only this block is not necessary, because the absolute value means 45 in fig. 5 already provides positive results. However, to achieve a correct frequency detection (synchronisation), this additional absolute block means is required.

In fig. 7, a time-/frequency synchronization means 22 is shown for  $M=2$ . In this case, the correlations means consists only of one correlator part 28. The correlation delay value  $L2$

is  $S/2$  and the moving average parameter  $L2$  is smaller or equal  $S/2$ , whereby the best performance is achieved if  $L2$  is close to  $S/2$ .

In fig. 8, a time-/frequency synchronization means 22 is shown for  $M=4$ . In this case,  
5  $L1=S/4$  and  $L2 \leq S/4$ .

In fig. 9, the frequency offset detection means 47 shown in figs. 6, 7 and 8 is shown in more detail. As stated above, the frequency offset detection range is advantageously extended according to the present invention. The structure of the frequency offset detection  
10 means 47 shown in fig. 9 provides this extended frequency offset detection range.

The frequency offset is  $\Delta f = M \times f_0 \times (1/2\pi) \times \arctan(q/i)$ , wherein  $M$  is the number of the repeated wave forms in one OFDM time burst,  $f_0$  the subcarrier spacing, "i" the in-phase part and "q" the quadrature part of the complex output of the MAV means 40. As shown  
15 in fig. 9, the frequency offset detection means 47 comprises a split means 48, a calculation means 49 and a multiplier 50. In the split means 48, the complex output of the MAV means 40 is separated in an "in" and a "quad" component, when the split means 48 receives a peak detection signal from the peak detection means 46. The peak detection means produces a peak detection signal every time it detects a peak. The "in" and "quad"  
20 component from the split means 48 are then fed to the calculation means 49. The calculation means 49 calculates the mathematical expression of  $(1/2\pi) \times \arctan(q/i)$ , which can be done in a look-up table (hardware implementation) or calculated in a processor. The calculation result from the calculation means 49 is supplied to the multiplier 50. The multiplier 50 multiplies the calculation result from the calculating means 49 with  
25  $M$  (number of repeated wave forms in one OFDM time burst). The result of the multiplication in the multiplier 50 is the frequency offset  $\Delta f$  as a fraction of the subcarrier spacing  $f_0$  (result  $= \Delta f / f_0$ ). The detected frequency offset is used in the synchronisation unit 22 of the receiving apparatus to obtain the frequency synchronisation.

30 In fig. 10, a frequency spectrum of a conventionally correlated signal (cyclic extension) is shown and compared with a frequency spectrum shown in fig. 11 for a signal correlated according to the present invention. The parameter for the example shown in fig. 10 has been calculated for a RACH-burst. Its parameters are: signal to noise ratio: 6,0dB, frequency offset:  $-0,30001 \times f_0$ , guard samples per burst: 16, RACH-scheme: 4, number  
35 of RACH-slots: 4, discrete Fourier transformation size (=number of subcarriers or number of OFDM-burst samples): 128 and used subcarriers per slot: 96.



As can be seen, the present invention provides for very good peak detection compared to the conventional correlation. The four bursts in the signal stream can be clearly identified. The detected frequency offset values are: 0,3004; 0,3081, 0,3117 and 0,3151 which is very accurate (error < 5%).

## SONY INTERNATIONAL (EUROPE) GMBH

5

## Claims

1. Transmission method for transmitting OFDM-signals,  
comprising the steps of  
modulating said signals onto a plurality of subcarriers using a OFDM-modulation method,  
10 transforming said modulated signals into the time domain, and  
transmitting said signals  
**characterized in**  
that in said modulating step every M-th subcarrier is modulated with a signal, wherein M  
is an integer and  $M \geq 2$ .
- 15 2. Transmission method according to claim 1,  
**characterized in,**  
that the not modulated subcarriers are set to zero.
- 20 3. Transmission method according to claim 1 or 2,  
**characterized in,**  
that  $M=2$  and only subcarriers with even indices are modulated.
4. Transmission method according to one of the claims 1 to 3,  
25 **characterized in**  
that said modulation step comprises the steps of  
generating integer values form 0 to L-1, wherein L is the number of available subcarriers,  
and  
modulating every M-th signal onto said subcarriers on the basis of said integer values.

30

5. Transmission apparatus for transmitting OFDM-signals, comprising modulation means (4) for modulating said signals onto a plurality of subcarriers using a OFDM-modulation method,

5 transformation means (5) for transforming said modulated signals into the time domain, and

transmission means for transmitting said signals

**characterized in**

that in said modulation means every M-th subcarrier is modulated, wherein M is an integer

10 and  $M \geq 2$ .

6. Transmission apparatus according to claim 5,

**characterized in,**

that in said modulation means (4) the not modulated subcarriers are set to zero.

15

7. Transmission apparatus according to claim 5 or 6,

**characterized in,**

that in said modulation means (4)  $M=2$  and only subcarriers with even indices are modulated.

20

8. Transmission apparatus according to one of the claims 5 to 7,

**characterized in**

that said modulation means (4) comprises means (10) for generating integer values from 0 to L-1, wherein L is the number of available subcarriers, whereby said modulation means

25 (4) modulates every M-th signal onto said subcarriers on the basis of said integer values.

9. Receiving method for receiving OFDM-signals comprising M identical or respectively mirrored wave forms within one OFDM-timeburst, wherein M is an integer and  $M \geq 2$ , comprising the steps of

30 receiving said OFDM-signals,

correlating said wave forms to obtain time synchronization,

transforming said signals into the frequency domain, and demodulating said signals.

10. Receiving method according to claim 9,

5 **characterized in,**

that in said correlation step said wave form parts are correlated on the basis of a delay value  $L1 = S/M$  and averaged over  $L2 \leq S/M$  samples, whereby S is the total number of samples in one OFDM-timeburst.

10 11. Receiving method according to claim 9 or 10,

**characterized in,**

that after said correlation step a peak detection step is carried out to provide time synchronization for said transformation of said signals into the frequency domain.

15 12. Receiving method according to one of the claims 9 to 11,

**characterized in,**

that after said correlation step a frequency offset detection step is carried out to provide frequency synchronization for said transformation of said signals into the frequency domain.

20

13. Receiving apparatus for receiving OFDM-signals comprising M identical or respectively mirrored wave forms within one OFDM-timeburst, wherein M is an integer and  $M \geq 2$ , comprising

receiving means for receiving said OFDM-signals,

25 correlation means (28, 29, 30, 31) for correlating said wave forms to obtain time synchronization, transformation means (23) for transforming said signals into the frequency domain, and

demodulation means for demodulating said signals.

30

14. Receiving apparatus according to claim 13,  
**characterized in,**

that in said correlation means (28, 29, 30, 31) said identical wave forms are correlated on the basis of a delay value  $L1 = S/M$  and averaged over  $L2 \leq S/M$  samples, whereby S is  
5 the total number of samples in one OFDM-timeburst.

15. Receiving apparatus according to claim 13 or 14,  
**characterized in,**

10 that after said correlation means (28, 29, 30, 31) a peak detection means (46) is provided for providing time synchronization for said transformation of said signals into the frequency domain.

16. Receiving apparatus according to one of the claims 13 to 15,  
**characterized in,**

15 that after said correlation means (28, 29, 30, 31) a frequency offset detection means (47) is provided for providing frequency synchronization for said transformation of said signals into the frequency domain.

17. Transmission system for transmitting OFDM-signals, comprising a transmission  
20 apparatus according to one of the claims 5 to 8 and a receiving apparatus according to one of the claims 13 to 16.

**SONY INTERNATIONAL (EUROPE) GMBH**

5

**Abstract**

The present invention relates to a transmission apparatus for transmitting OFDM-signals comprising modulation means 4 for modulating said signals onto a plurality of subcarriers using a OFDM-modulation method, transformation means 5 for transforming said  
10 modulated signals into the time domain, and transmission means for transmitting said signals, whereby in said modulation means every M-th subcarrier is modulated, wherein M is an integer and  $M \geq 2$ . The present invention also relates to a corresponding transmission method for transmitting OFDM-signals.

15 The present invention further relates to a receiving apparatus for receiving OFDM-signals comprising M identical or respectively mirrored wave forms within one OFDM-timeburst, wherein M is an integer and  $M \geq 2$ , comprising receiving means for receiving said OFDM-signals, correlation means 22 for correlating said wave forms to obtain time  
20 synchronization, transformation means 23 for transforming said signals into the frequency domain and demodulation means 24 for demodulating said signals. The present invention also relates to a corresponding receiving method for receiving OFDM-signals. The present invention provides a much better time and frequency synchronisation performance based on correlation techniques than conventional OFDM-systems.

25 (fig. 3)

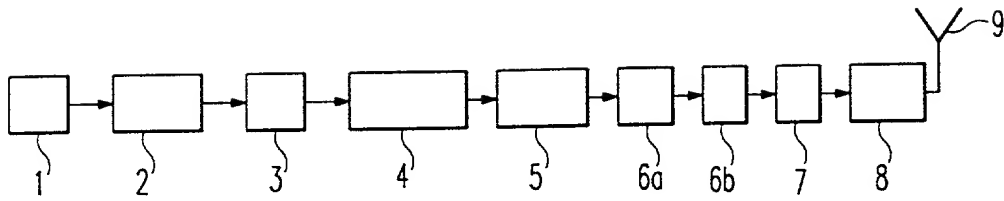


Fig. 1

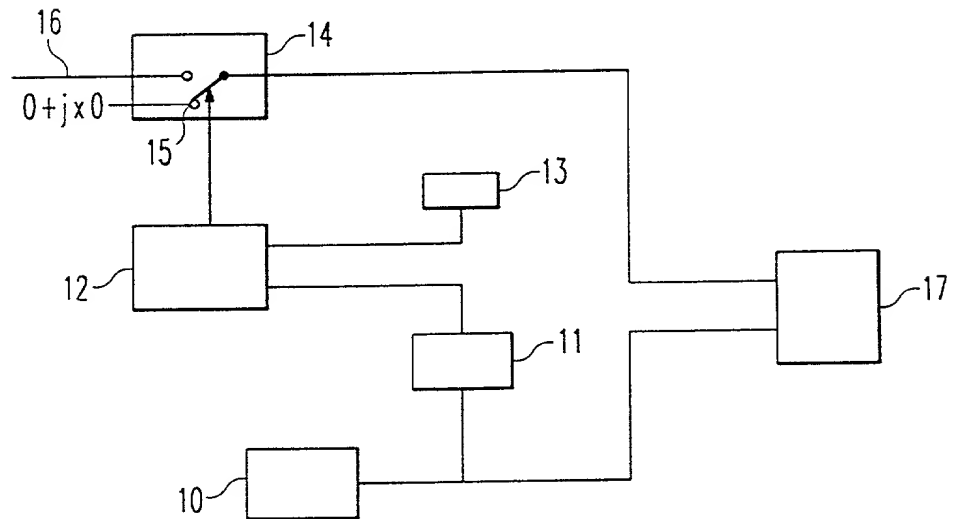


Fig. 2

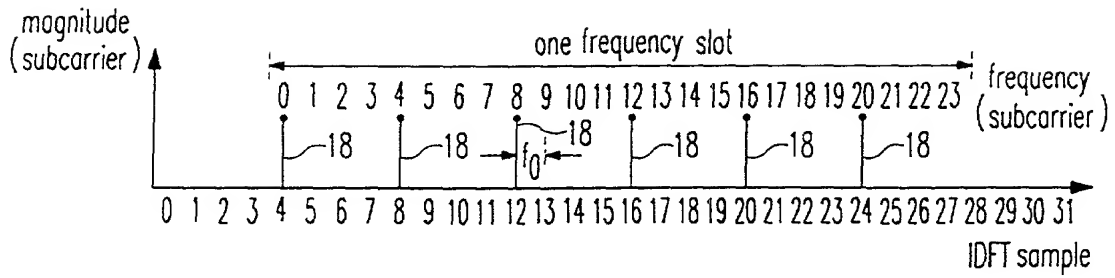


Fig. 3

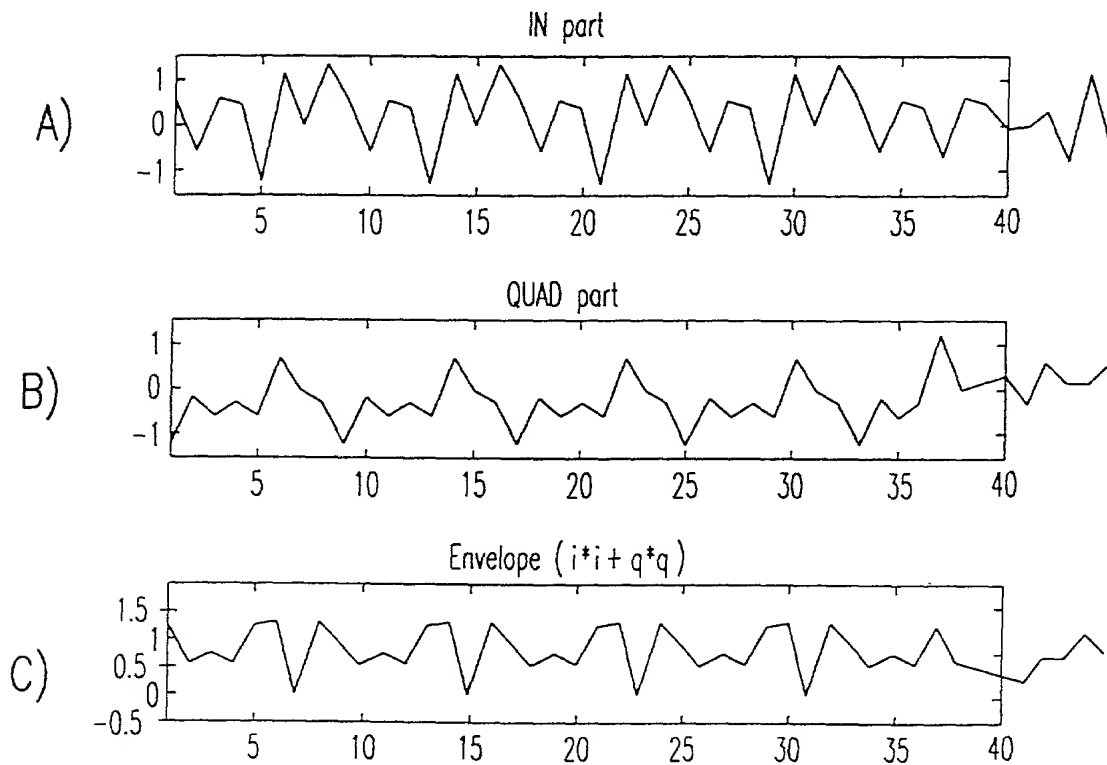


Fig. 4



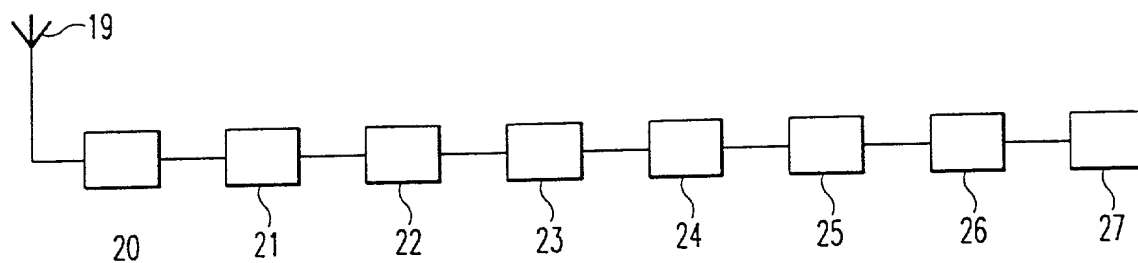


Fig. 5

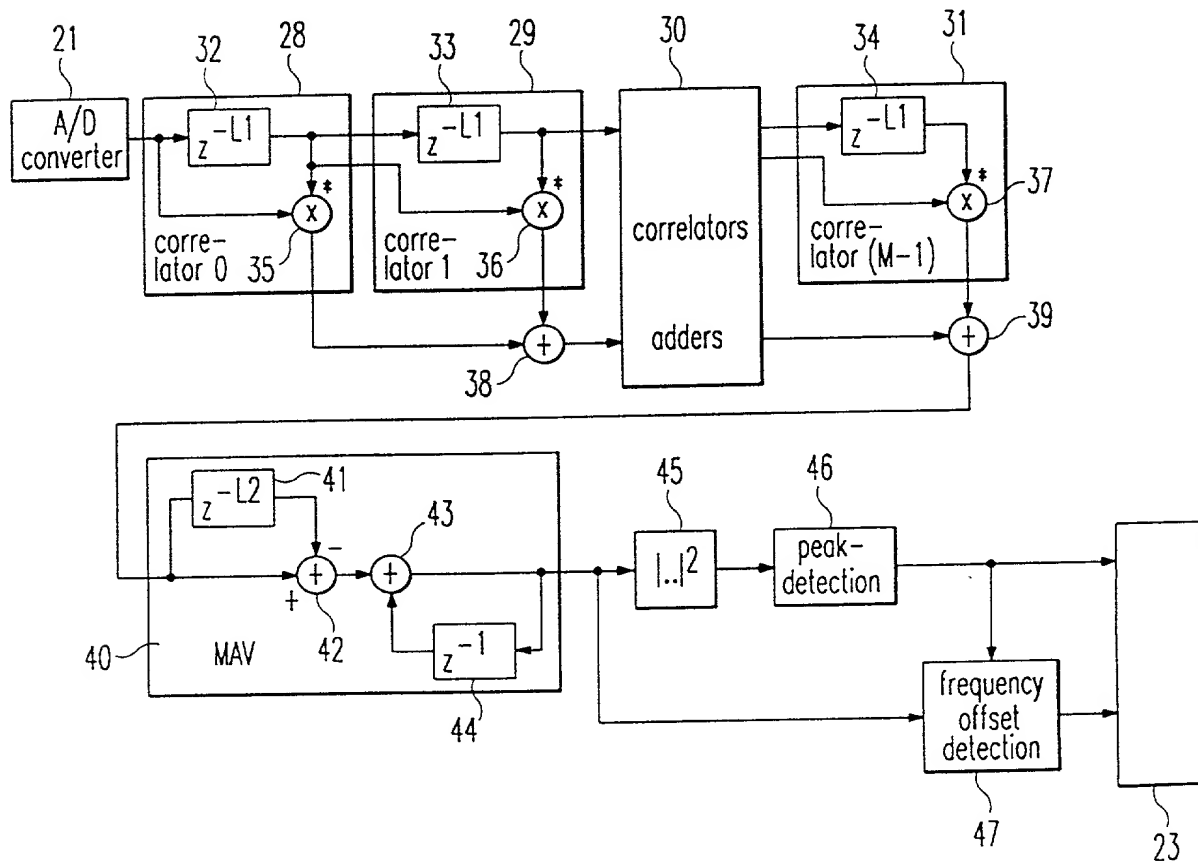


Fig. 6

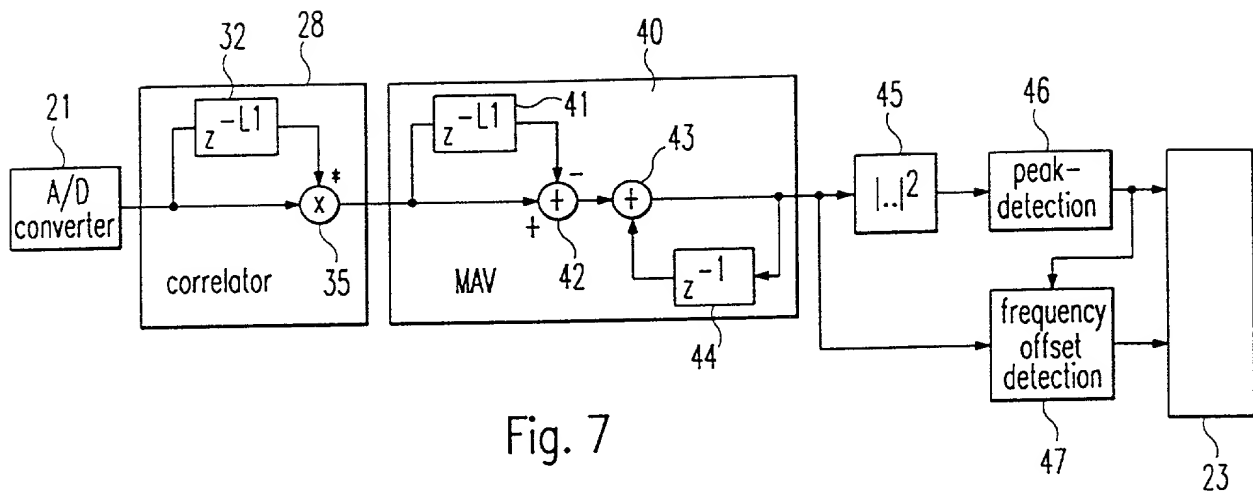


Fig. 7

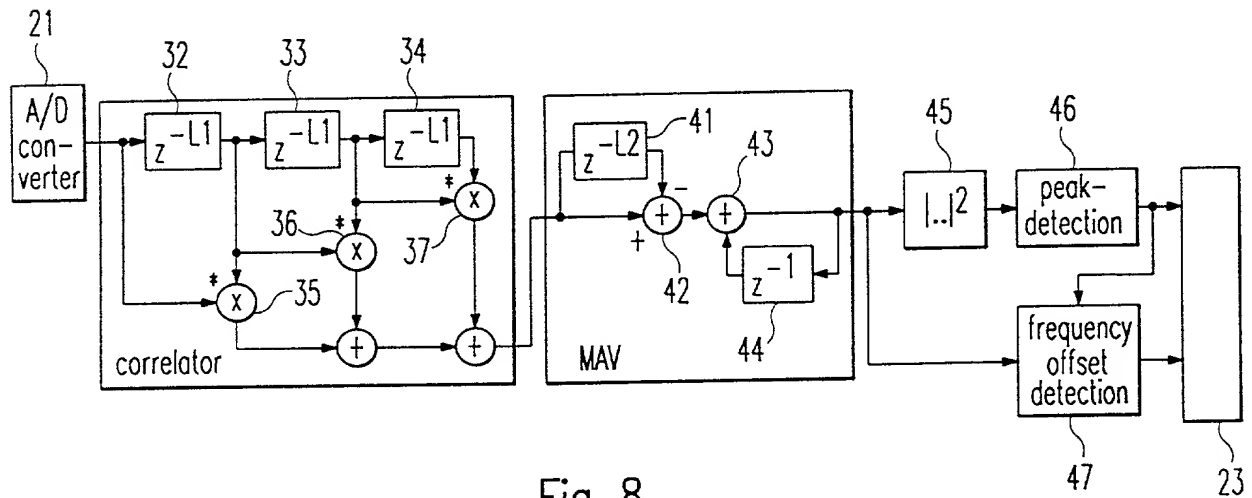


Fig. 8

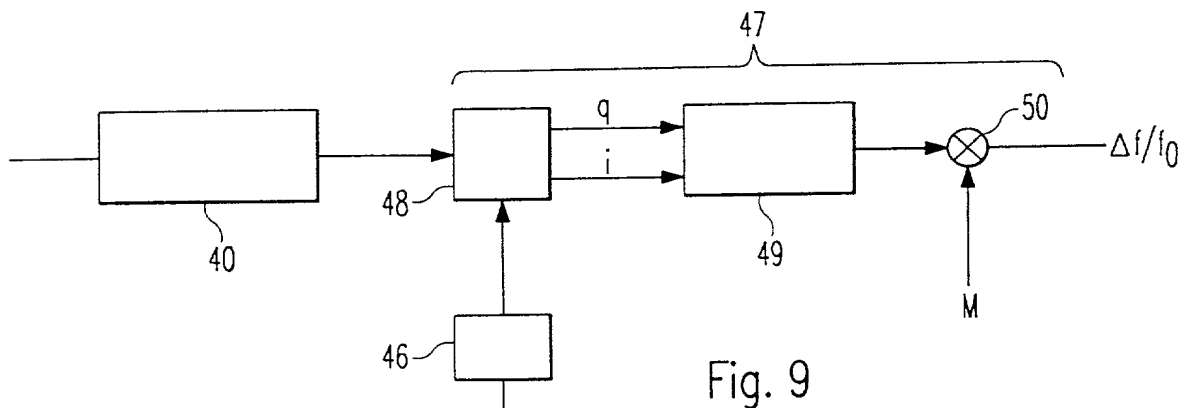


Fig. 9

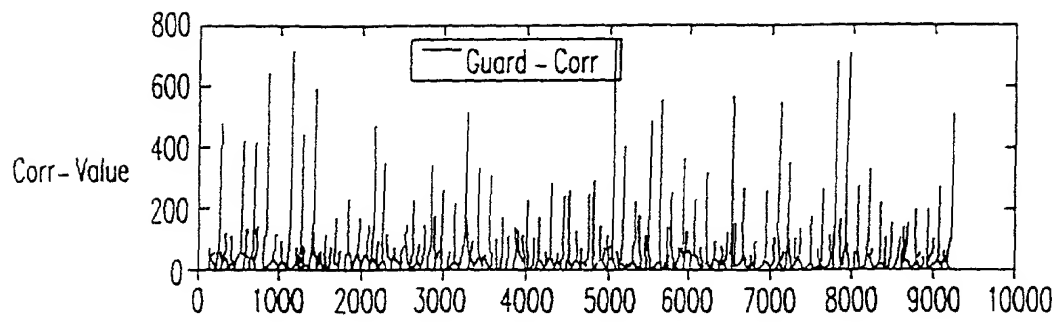


Fig. 10

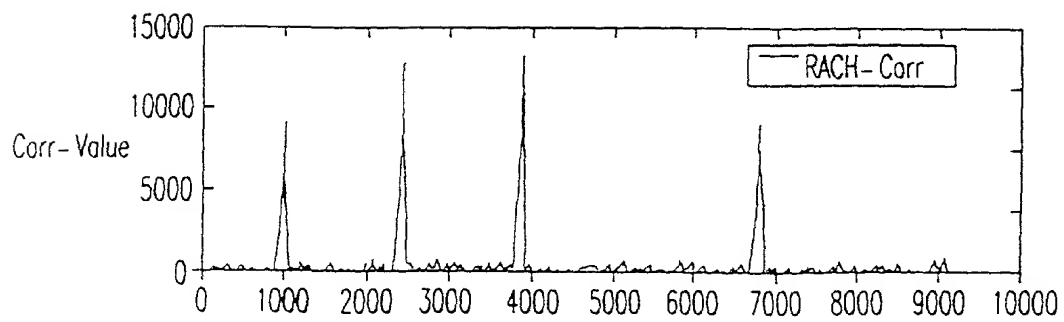


Fig. 11

**DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)**

**(Under 37 CFR § 1.63; with Power of Attorney)**

**FROMMER LAWRENCE & HAUG LLP**

FLH File No. 450117-4648

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,  
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first  
and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is  
sought on the invention ENTITLED:

**TRANSMISSION SYSTEM FOR OFDM-SIGNALS WITH OPTIMIZED SYNCHRONISATION**

the specification of which

X is attached hereto.

\_\_\_\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_,

with amendment(s) through \_\_\_\_\_ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including  
the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me  
to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s)  
for patent or inventor's certificate listed below and have also identified below any foreign application for patent or  
inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>	[list additional applications on separate page]:	<u>Priority Claimed:</u>
Number: 97115345.7	Country: Europe	Filed (Day/Month/Year): 4 September 1997
		Yes No
		X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed  
below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United  
States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the  
duty to disclose to the United States Patent and Trademark Office all information known to me to be material to  
patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing  
date of the prior application and the national or PCT international filing date of this application:

<u>Prior U.S. Application(s)</u>	[list additional applications on separate page]:
Appln. Ser. Number: _____	Filed (Day/Month/Year): _____
	Status (patented, pending, abandoned): _____

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930  
or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this  
application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to  
receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection  
therewith, and specify that all communications about the application are to be directed to the following correspondence  
address:

WILLIAM S. FROMMER, Esq.  
c/o FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151

Direct all telephone calls to:  
(212) 588-0800  
to the attention of:  
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on  
information and belief are believed to be true; and further that these statements were made with the knowledge that  
willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of  
Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application  
or any patent issued thereon.

INVENTOR(S):

Signature: Ralf Böhnke

Date: 20. 8. 98

Full name of sole or first inventor:

Ralf Böhnke

Residence:

D-73732 Esslingen, Germany

Citizenship:

Germany

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Full name of 2nd joint inventor (if any):

Residence:

Citizenship:

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Full name of 3rd joint inventor (if any):

Residence:

Citizenship:

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

[if all inventors have the same post office address]

SONY International (Europe) GmbH  
Hugo-Eckener-Strasse 20  
D-50829 Köln-Ossendorf  
GERMANY

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity  
having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or  
Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern,  
Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.